FIBOX FSC-480-144-6-01
6 TRAY - 144 FIBER OPTIC CLOSURE
OVERVIEW

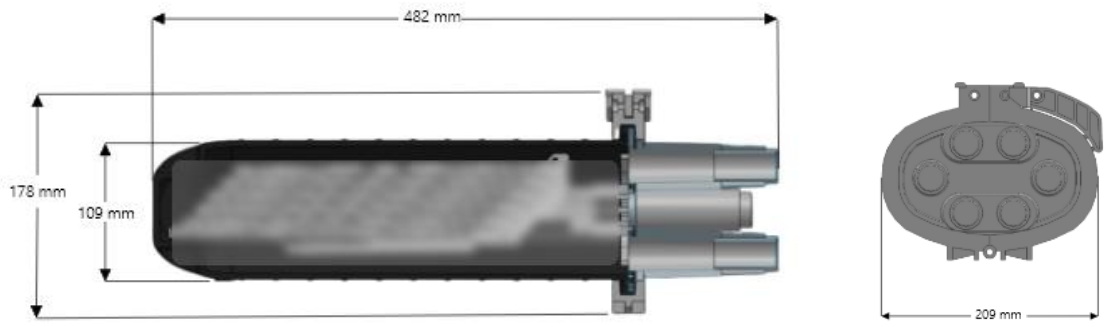
- Compatible with any fiber cable structures. (single /multi tube, armored/unarmored etc.)
- Can be used with in all environment. (Aerial, buried, manhole).
- Customized fiber port design; 6 round ports or 2 oval ports and 2 round ports.
- Hinged tray.
- Heat shrinks sleeve and hot melt adhesive system.



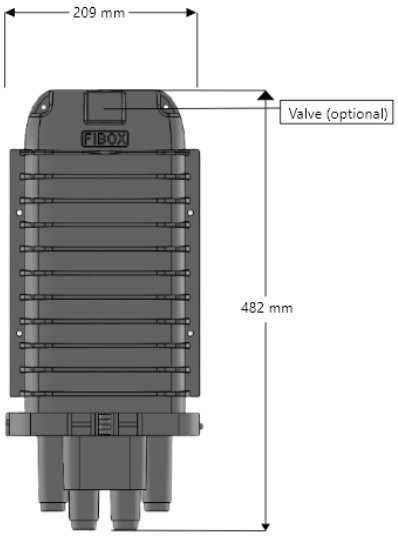
FEATURES

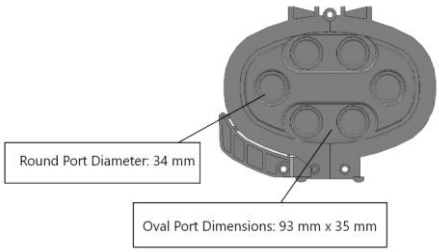
Model No	FIBOX 480-144-6-01
Fiber Capacity	144 splices (6x24)
Dimensions	482 mm x 209 mm x 178 mm (with clamp)
Ports	6 rounds or 2 rounds and 2 oval port. (Oval ports can be converted to round ports)
Trays	6 Trays
Protection Level	IP 68

DESIGN SECTION
SECTION-1:



SECTION-2:


209 mm
Valve (optional)
482 mm


Round Port Diameter: 34 mm
Oval Port Dimensions: 93 mm x 35 mm